



NOTE:
LAY PIPE THROUGH MANHOLE FOR CHANNEL
IF THE SLOPE IN AND OUT OF THE MANHOLE
ARE THE SAME.

- ALL PIPE PENETRATION MUST HAVE ADHESION COLLAR (SAND COLLAR) FOR POSITIVE SEAL TO CONCRETE.
- ADD "RUBBER BOOT".
- SAND COLOR AS APPROVED BY CITY ENGINEER.

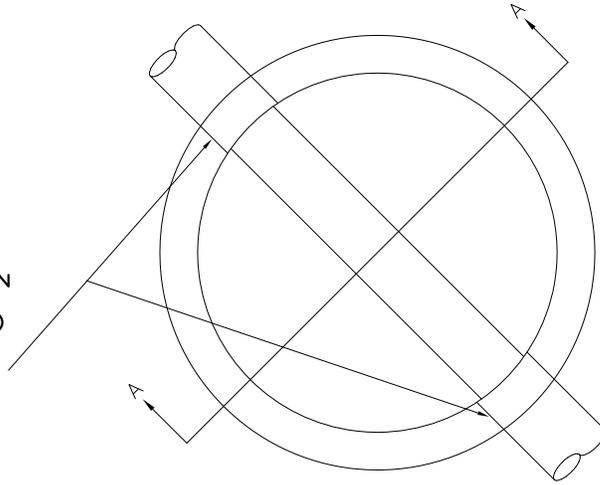


APPLY LIGHT BROOM
FINISH TO INSIDE OF BASE

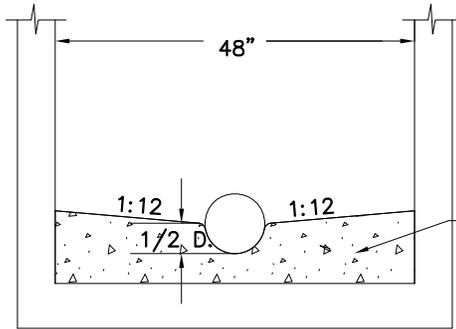

6" COMPACTED 3/4"-0" CRUSHED
ROCK ON STABLE SUBGRADE

PRECAST BASE

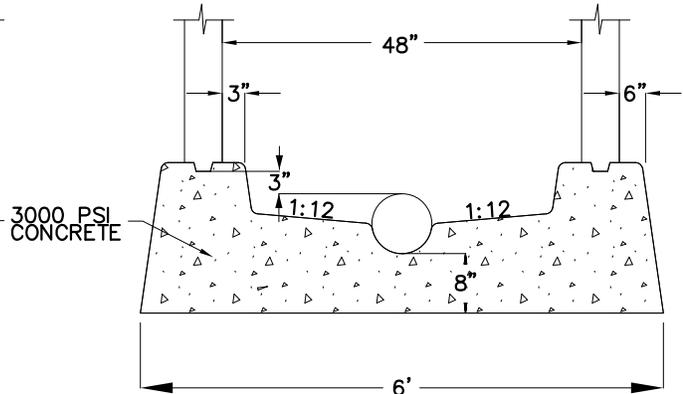

6" COMPACTED 3/4"-0" CRUSHED
ROCK ON STABLE SUBGRADE

POURED IN PLACE BASE

| |
|------------|
| REVISIONS: |
| |
| |
| |

MANHOLE BASE

| | |
|------------------|------------|
| SCALE: | N.T.S |
| DATE: | May 2007 |
| APPROVED BY: | D. Danicic |
| STANDARD DRAWING | 203 |