




1. EXCAVATE TRENCH

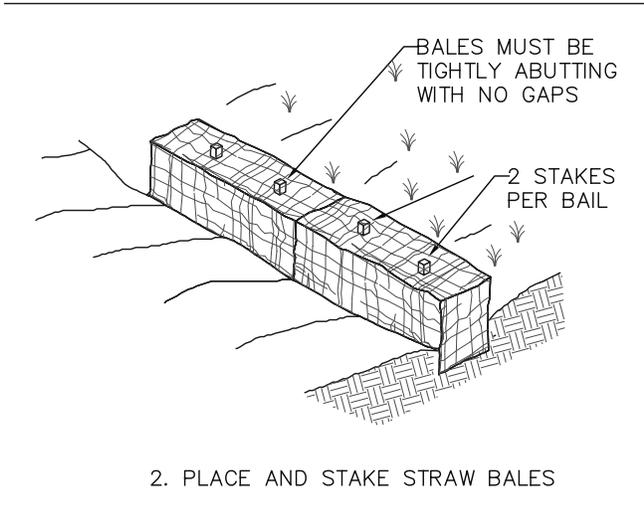

2. PLACE AND STAKE STRAW BALES

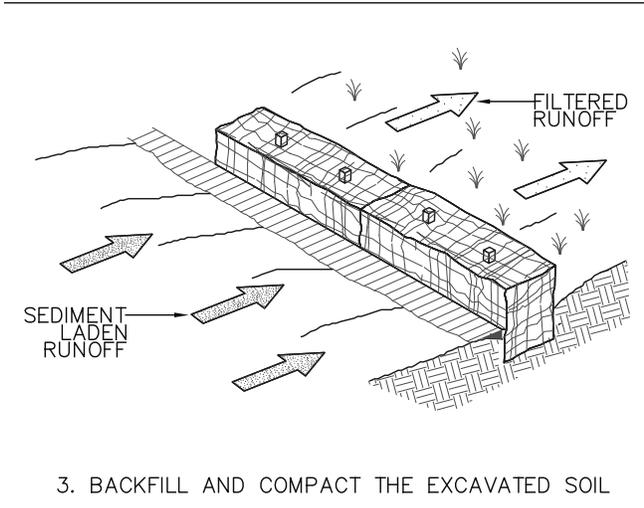

3. BACKFILL AND COMPACT THE EXCAVATED SOIL

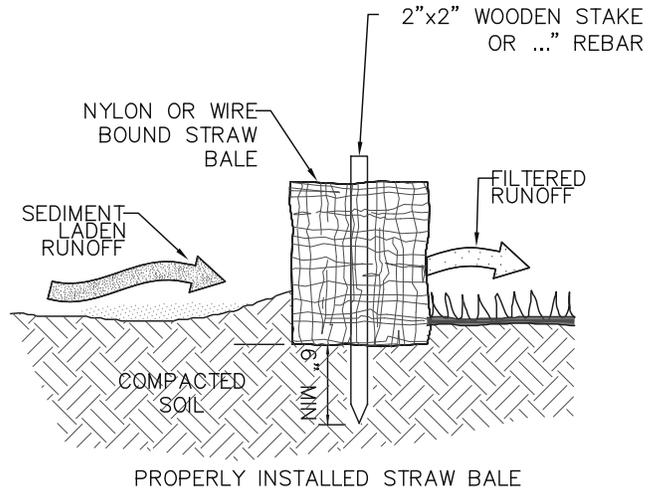

GENERAL NOTES:

1. EACH BALE SHALL BE EMBEDDED IN THE SOIL A MINIMUM OF 4".
2. BALES SHALL BE SECURELY ANCHORED IN PLACE BY $\frac{3}{8}$ " REBAR OR 2"x2" WOODEN STAKES DRIVEN THROUGH THE BALES.
3. INSPECTION SHALL BE PERFORMED WEEKLY OR AFTER EACH RAINFALL EVENT. REPAIR AND OR REPLACEMENT SHALL BE MADE AS NEEDED BY THE CONTRACTOR, OR AS DIRECTED BY THE INSPECTOR.
4. WHEN SILT REACHES A DEPTH OF 6", IT SHALL BE REMOVED AND DISPOSED OF IN AN APPROVED SITE.
5. AFTER THE SITE IS COMPLETELY STABILIZED, THE BALE AND ACCUMULATED SILT SHALL BE REMOVED AND DISPOSED OF AT AN APPROVED DISPOSAL SITE.

REVISIONS:

STRAW BALE BARRIER

SCALE:	N.T.S.
DATE:	May 2007
APPROVED BY:	D. Danicic
STANDARD DRAWING	603