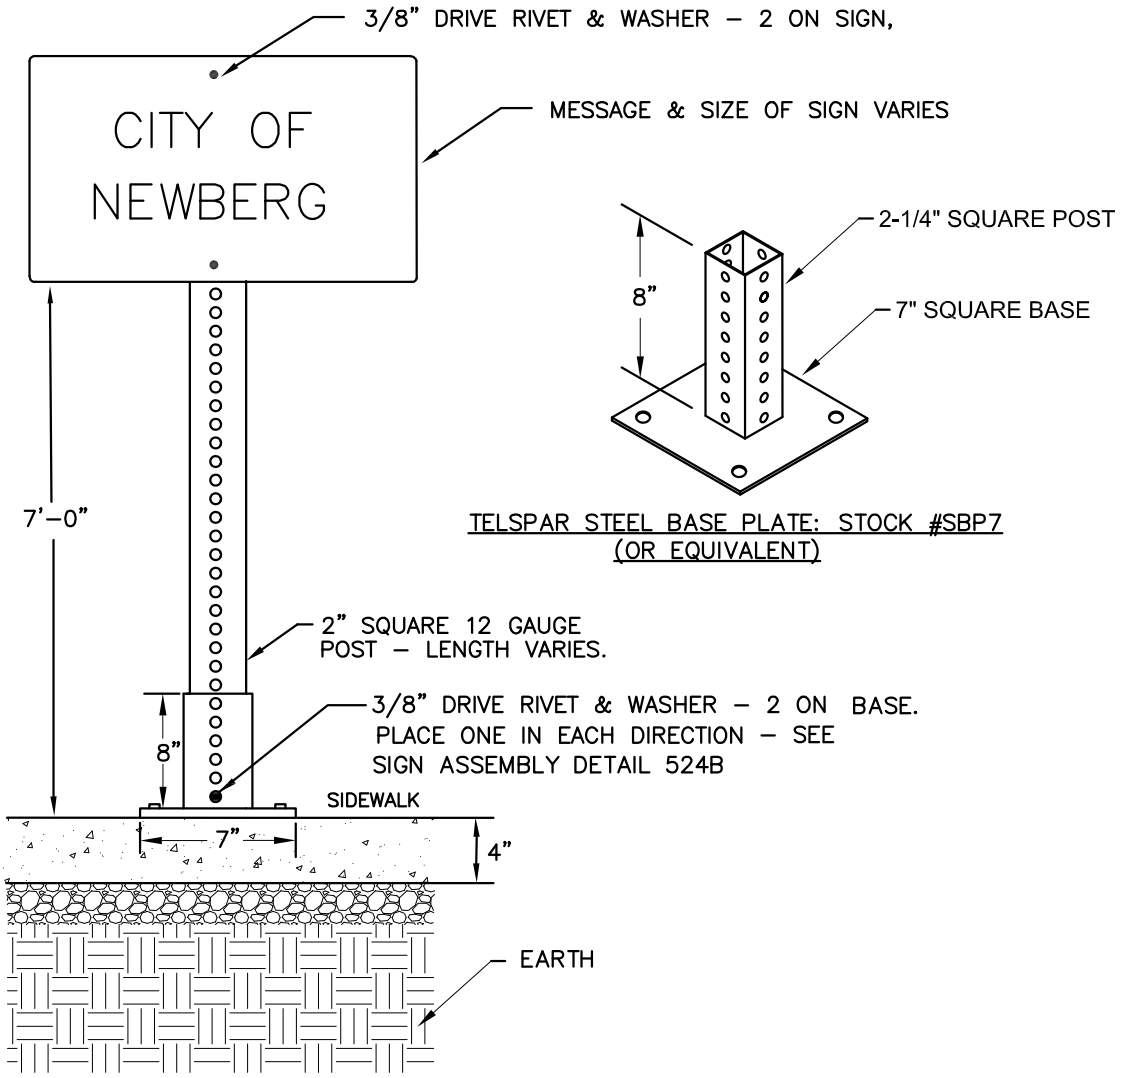

1. STEEL BASE SHALL BE A 2 1/4" SQUARE 12 GAUGE POST
2. SIGN POST PLACEMENT IN CONCRETE SHALL BE A MINIMUM OF 24" FROM CURB FACE – VARIES BY SIGN SIZE.
3. USE 1/2" X 4–1/4" RED HEAD FASTENERS FOR STEEL BASE PLATE
4. STEEL BASE PLATE APPLICATION FOR EXISTING CONCRETE ONLY
5. FOR EXISTING SIDEWALK, WITH CITY OF NEWBERG ENGINEERING DIVISION APPROVAL ONLY.

City of Newberg
PUBLIC WORKS ENGINEERING DIVISION
414 E. FIRST STREET NEWBERG, OR 97132
PHONE: 503–537–1240
FAX: 503–537–1277

REVISIONS:	STANDARD SIGNPOST CONCRETE APPLICATIONS	SCALE: N.T.S.
OCT. 2010		DATE: JULY 2004
		APPROVED BY: D. Danicic
		STANDARD DRAWING 525B