


EXCAVATE STREET TO MINIMAL DEPTH SPECIFIED IN TABLE. CONSTRUCT MATERIAL AS SHOWN BELOW. SITE SOILS AND WEATHER CONDITIONS MAY REQUIRE GREATER STRUCTURAL SECTIONS AND GEOTEXTILE (NON-WOVEN) PER CITY ENGINEER.

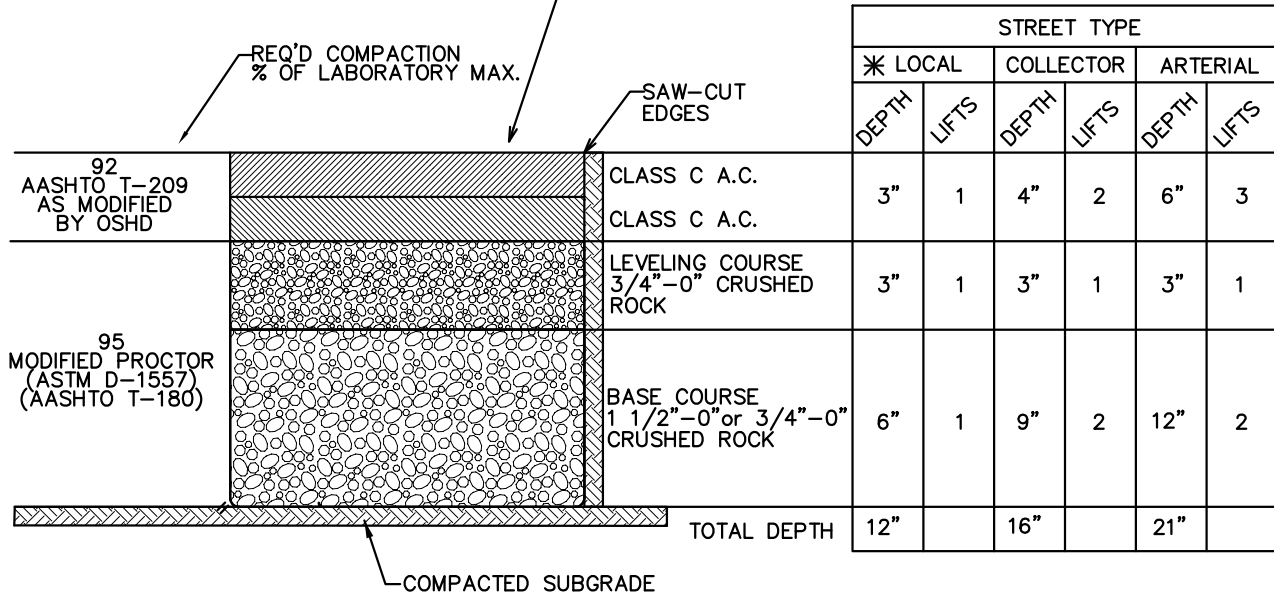

GEOTEXTILE SPECIFICATIONS

PROPERTY	TEST	MIN. VALUE
TENSILE STRENGTH, lbs	ASTM D-4632	120
ELONGATION, WET %	ASTM D-4632	40
COEFFICIENT OF WATER PERMEABILITY, cm/sec	ASTM D-4491	0.10
PUNCTURE STRENGTH, lbs	ASTM D-4833	80
MULLEN BURST STRENGTH, psi	ASTM D-3786	250

\* LOCAL STREET TYPE = INTERIOR RESIDENTIAL SINGLE FAMILY DETACHED ZONES